150
150
164
164
MID-SEALING
END-SEALING
STOP
INCHING
START
WEINVIEW

□□□□□□

PACKING 1

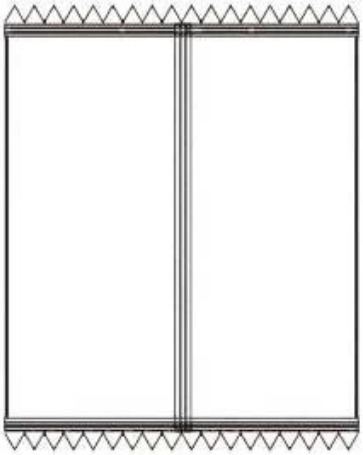

PACKING 2

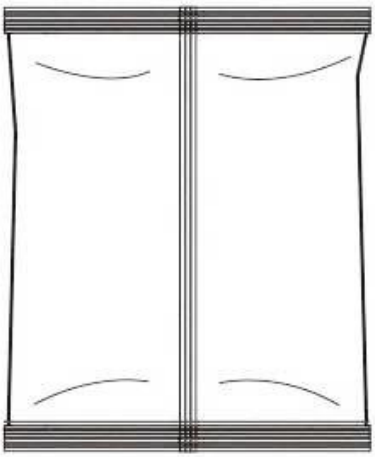

PACKING 3

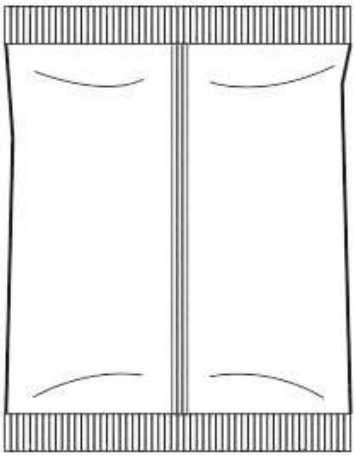

PUNCHING PACKING 1

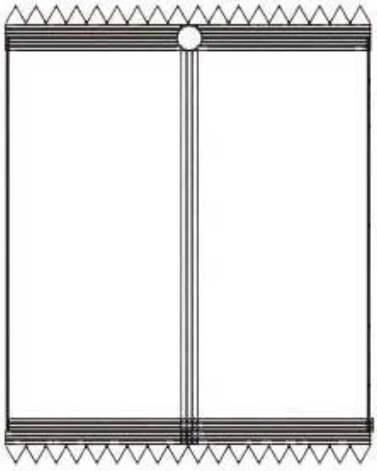

PUNCHING PACKING 2

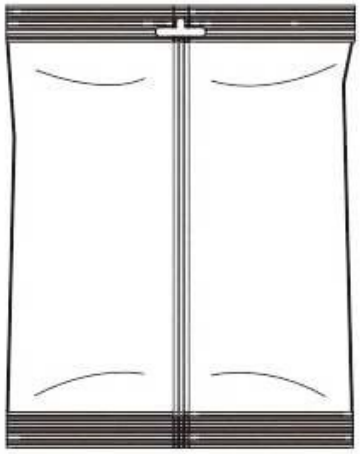

PUNCHING PACKING 3

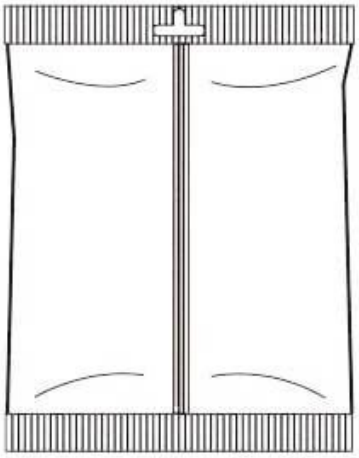

製品の利点

主な特徴

1. 食品接触部はステンレス構造で、食品QS（生産許可証）と医療GMPの衛生基準に適合しています。

2. [illegible]

3.[illegible]

4.[illegible]PID[illegible]

5.[illegible]

6.[illegible]

7.[illegible]

8. [illegible] [illegible]

[illegible]

[illegible]	JYT-450W	JYT-600W
[illegible]	[illegible]450mm	[illegible]600mm
[illegible]	120[illegible]450mm	120[illegible]600mm
[illegible]	50[illegible]160mm	50[illegible]200mm
[illegible]	10[illegible]80mm	10[illegible]100mm
[illegible]	[illegible]320mm	[illegible]320mm
[illegible]	20[illegible]70[illegible]/[illegible]	20[illegible]75[illegible]/[illegible]
[illegible]	3980×860×1530mm	3980×970×1530mm
[illegible]	550kg	650kg
[illegible]	220v[illegible]50/60hz[illegible]3.2kva	220v[illegible]50/60hz[illegible]3.2kva

[illegible]

100%[illegible] T/T[illegible] [illegible]70% [illegible]L/C [illegible]

[illegible]

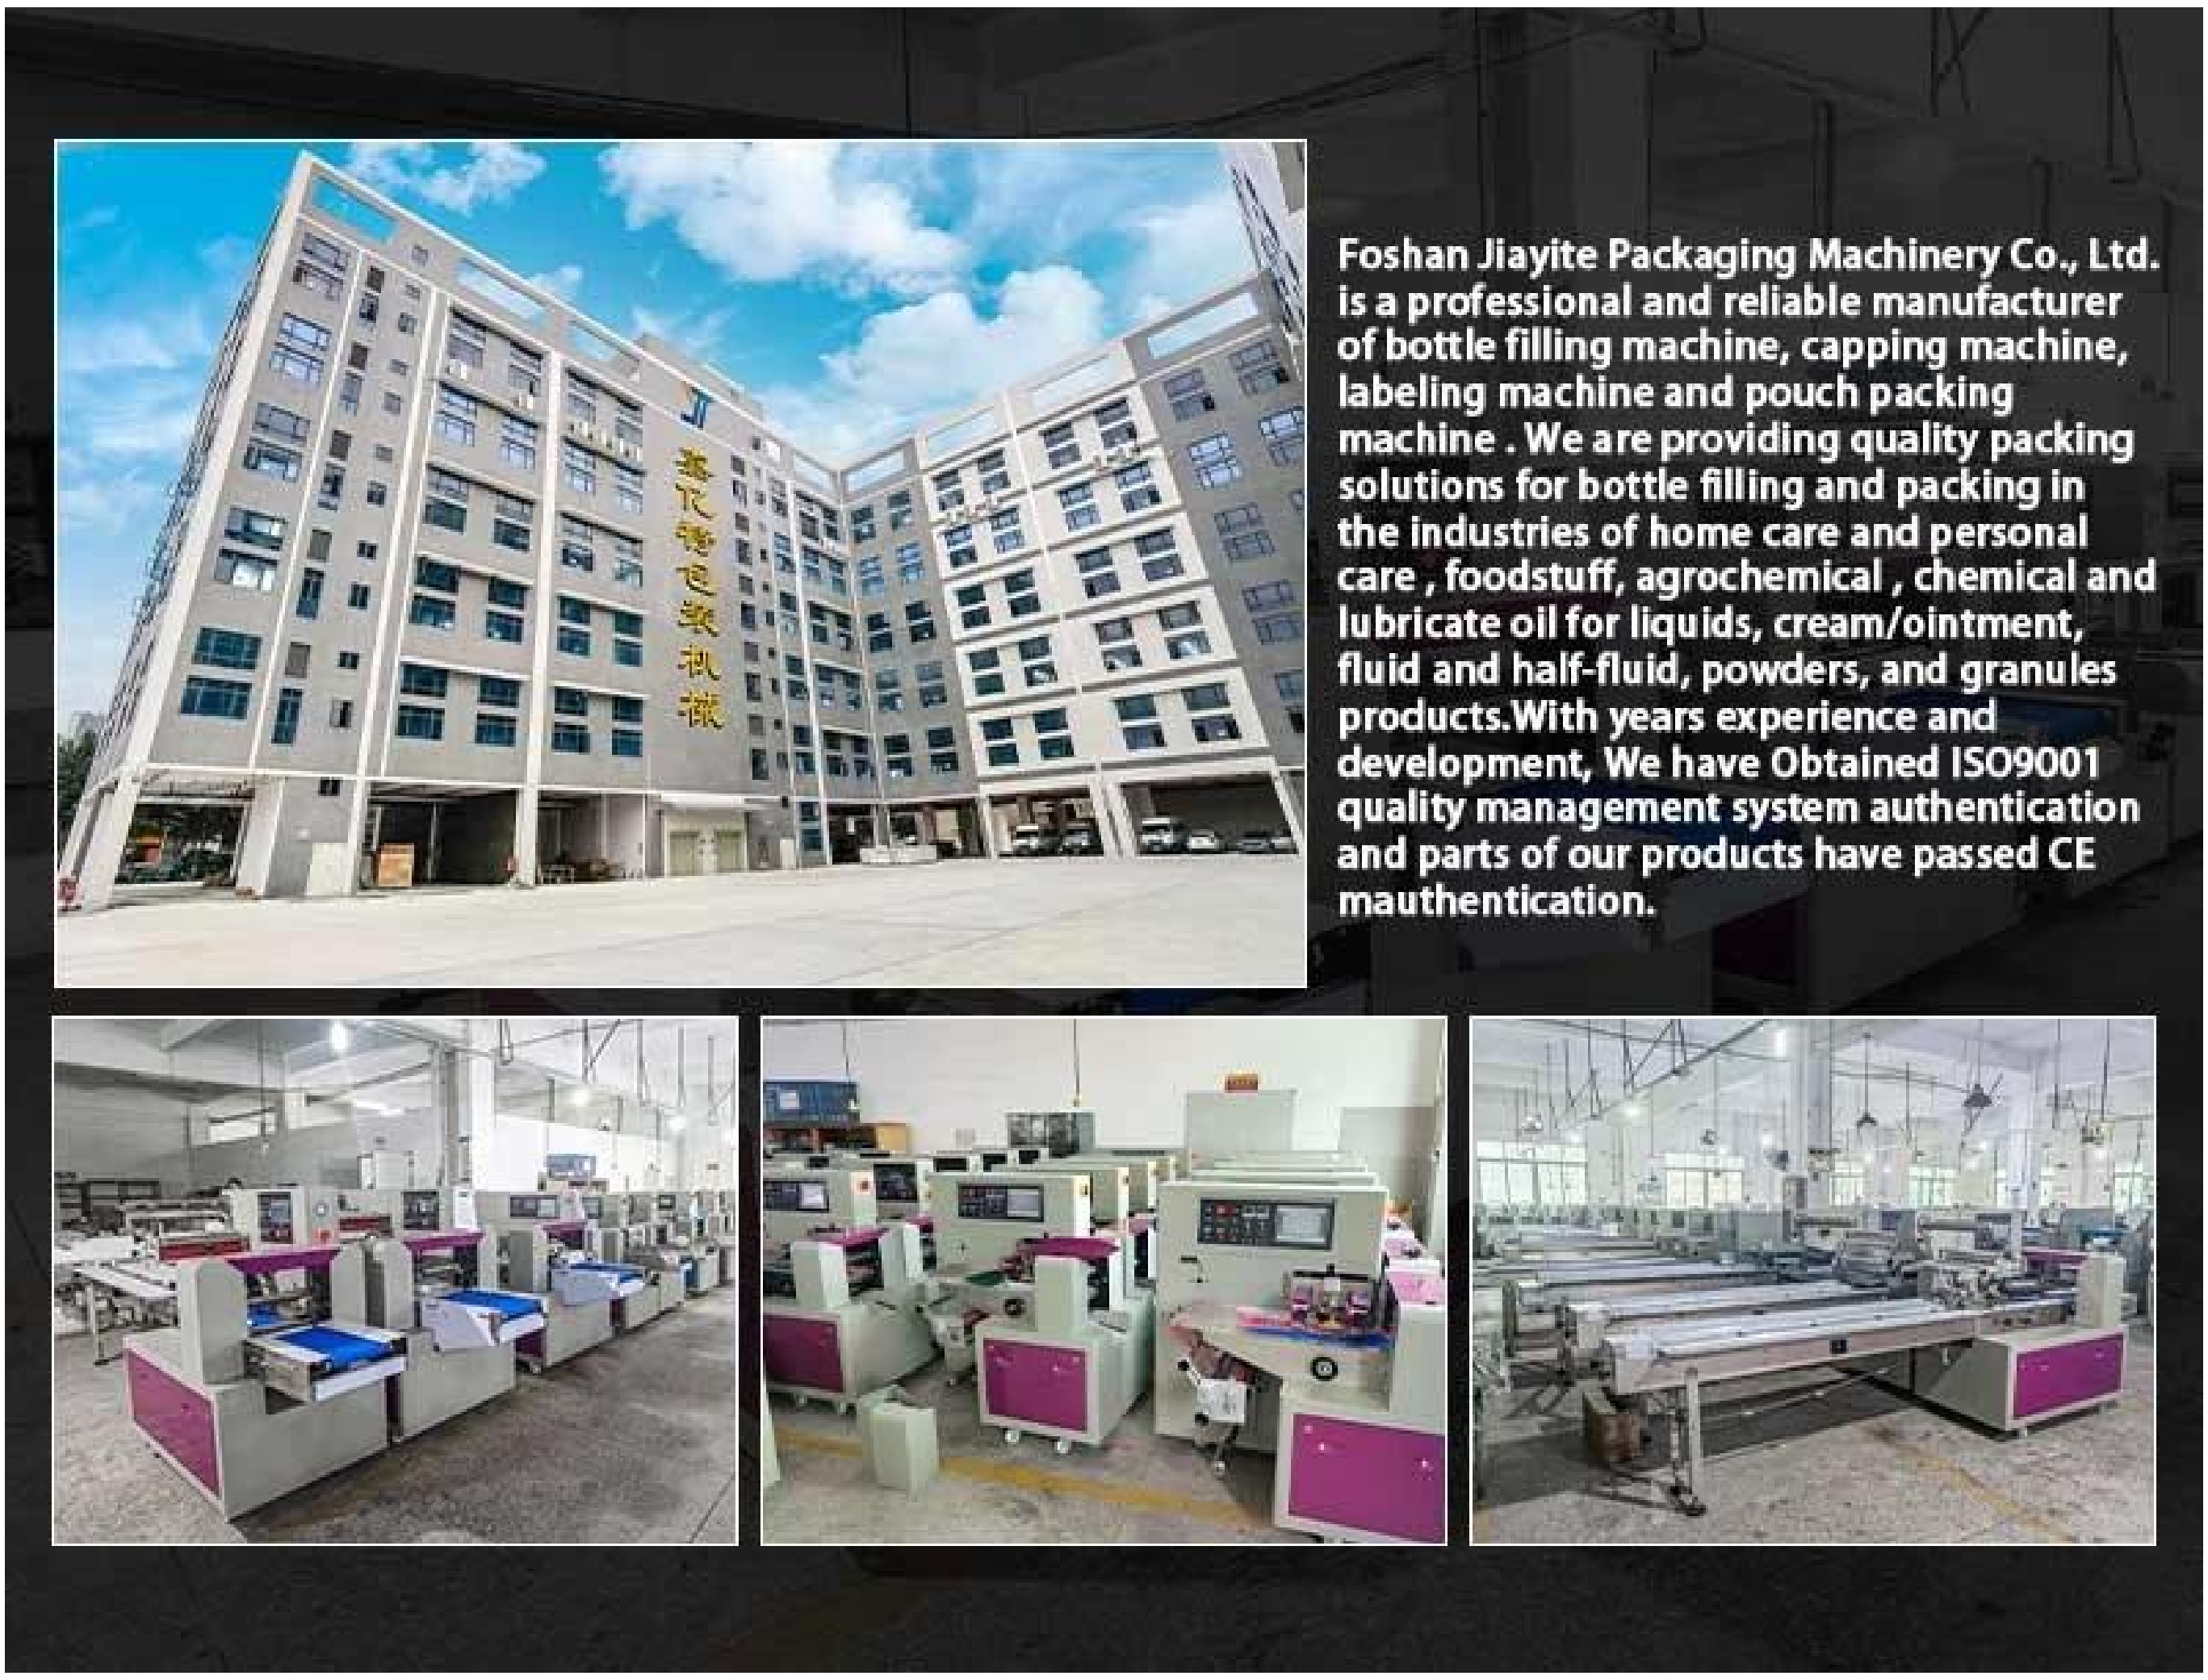

[illegible] JYT [illegible]/[illegible]ISO9001[illegible]CE[illegible]

EXHIBITION RECORD

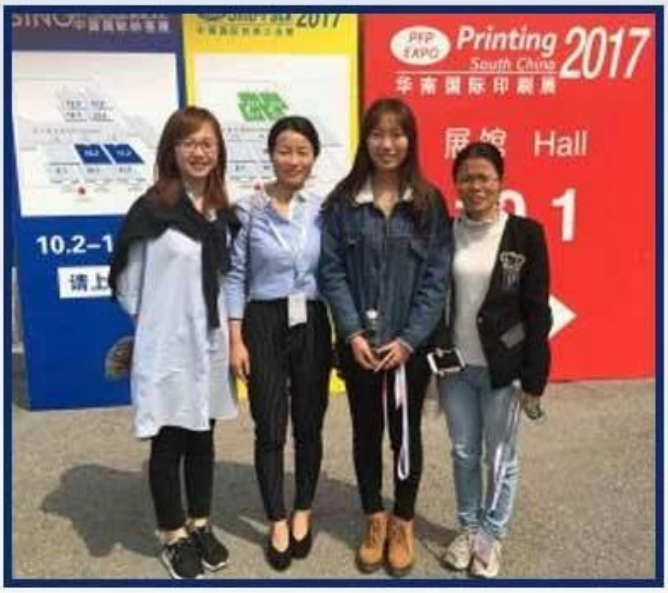

Our Customers

Our Advantage

On-site installation, commissioning and training

Specially customized based on actual situation

High automation, simple operation and labor saving

Life long technical service support

AFTER-SALES SERVICE

PACKAGING SHIPPING

[illegible]FCA[illegible]FOB[illegible]CNF[illegible]CIF [illegible] DHL[illegible]UPS[illegible]FedEx[illegible]TNT[illegible]EMS [illegible]

[illegible]

Q1.[illegible]

A1: [illegible] [illegible]

Q2.[illegible]

A2: [illegible] QC [illegible] [illegible] 1 [illegible]

Q3.[illegible]

A3: [illegible].

Q4.[illegible]

A4: [illegible] [illegible]

Q5.[illegible] [illegible] [illegible] [illegible] [illegible]

A5: [illegible] [illegible] [illegible] [illegible]

Q6.あなたの工場を訪問できますか**?**

A6: はい、都合の良い時間に工場を訪問することを歓迎します。