

APPLICATION

Customize the shape of the required box according to your needs




















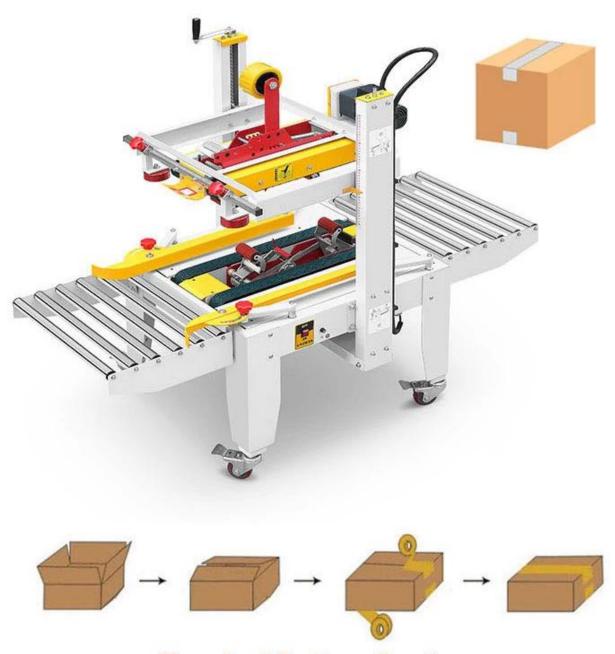

Top And Bottom Sealing

□□ □□□ □□ W 180-500mm H 130-500mm

□□ □□ 20m/□

L1560 * W780 * H1340mm

L1760*W1080*H1640mm

□□ □□□ □□ 220/380V 50Hz

□□ □□ □□ 0.18kw

□□□ □ 48/60/75mm

□□ □□ 120kg
□ □□ 160kg


00 00 1. 000 PLC 00 00 0000 0000 000 0000 000 0000.





Can be customized and adjustedto suit various box sizes and dimensions








Neatly transport products into boxes



There are three tongue closing plates on the connecting plate, so that the whole box sealing action can be divided into three steps, that is, bending, inserting the tongue, and sealing.







PUSHING PART

Stably complete the pushing action of the material and the manual.







ABOUT US











VERTICAL WORKSHOP






LARGE VERTICAL WORKSHOP

CARTONING MACHINE WORKSHOP

ABOUT US

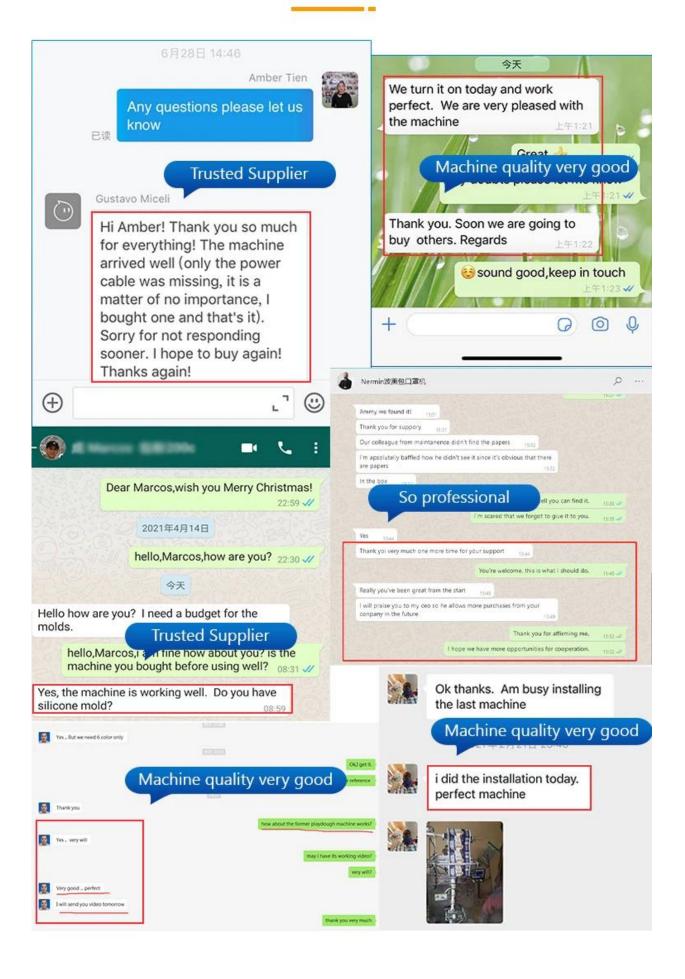

CUSTOMER WITNESS













OEM COOPERATION PROCEDURE



SPECIFIED REQUEST




















ABOUT PACKAGING





- Q3.000 00000? A3: 000 000000 00 0000 00 000 00 000 00000.
- Q5.000 000 000 000? A5: 0! 00 000 000 000 000.
- $Q6: \ \, \square\ \, \square\square\square\ \, \square\square\square\ \, \square\square\ \, \square\ \,$